

EUTECTIC CAST IRON BOILERS

COMMERCIAL AND INSTITUTIONAL


GT 330 A



Innovative Design
For Better Fuel
Efficiency



A Symbol of Quality
Engineering For Over
Three Centuries



- 88%+ Efficiency
- Near Condensing Eutectic Cast Iron - Water Temperature Supply @ 86°F
- Operates under large Temperature Differentials - Up to 81°F without Thermal Shock
- Low NOx Compatibility
- Maximum Working Pressure 90 p.s.i.

www.dedietrichboilers.com

De Dietrich
B O I L E R S



GT 330 A

High Performance Low-Temperature Return Eutectic Cast Iron Boilers

Low Return Water Capability Maximizes Energy Savings

Thermocord & Groove system eliminates gaskets - the number one cause of boiler maintenance



De Dietrich "eutectic" cast iron delivers 30% more flexibility, providing the industry's best thermal shock resistance



Flexible eutectic cast allows 85°F supply water capability. This low temperature operation yields significant fuel savings



The GT 330 A Series is a eutectic cast iron 3-pass, high efficiency, large net output, low operating temperature, designed boiler. These boilers are specifically designed for oil / gas / propane firing.

The GT 330 A is equipped with a simplified control panel with built-in on/off limit, high limit, manual reset limit and temperature gauge.

The GT 330 A is a Three Pass Design with large combustion chamber and horizontal flue passes with fins. The heat transfer is enhanced by the fins and eutectic cast iron baffles. This body design assures:

- Efficiency up to 88%
- Low pressure drops
- Low noise level
- High thermal efficiency and heat transfer

Low Water Outlet Temperature down to 85°F with indoor/outdoor reset achieves significant energy savings by reducing stand-by fuel consumption. In addition, it's not necessary to maintain boiler temperature between the two heating cycles, which further reduces fuel consumption and achieves excellent overall efficiency. Studies show substantial savings over retrofit boilers and over new competitive models.

Easy Cleaning with Hinged Door for burner and flue access. Doors can be hinged right or left based on your access needs. Boiler is easily cleaned and vacuumed, resulting in lower maintenance costs.

Eutectic Cast Iron boiler body provides exceptional resistance to temperature variations and thermal stress. De Dietrich's eutectic cast iron is 30% more flexible than any competitive cast iron allowing safe low temperature operation.

Four Inch Insulation featuring reinforced fiberglass wool. De Dietrich Boilers feature double insulation of the boiler front which minimizes heat loss and allows reduced stand-by consumption and improved thermal efficiency.

Control Panel. The standard control panel supplied is designed for heating only. The panel is equipped with a boiler thermometer, on/off limit, high limit and manual reset limit. The large size permits it to be integrated easily with third party energy management systems.

Standard Equipment

- Eutectic Cast Iron Nipples
- Built-in High Limit with Manual Reset
- Thermocord Combustion Sealed
- On/Off Limit
- Temperature Indicator
- ASME Relief Valve
- Low Water Cut-Off
- Low NOx Burners (optional)
- Factory Assembly (optional)


Contact your local De Dietrich representative for a list of available burners.

TH!NK BOILERS... TH!NK

De Dietrich
B O I L E R S

GT 330 A

High Performance Low-Temperature Return Eutectic Cast Iron Boilers

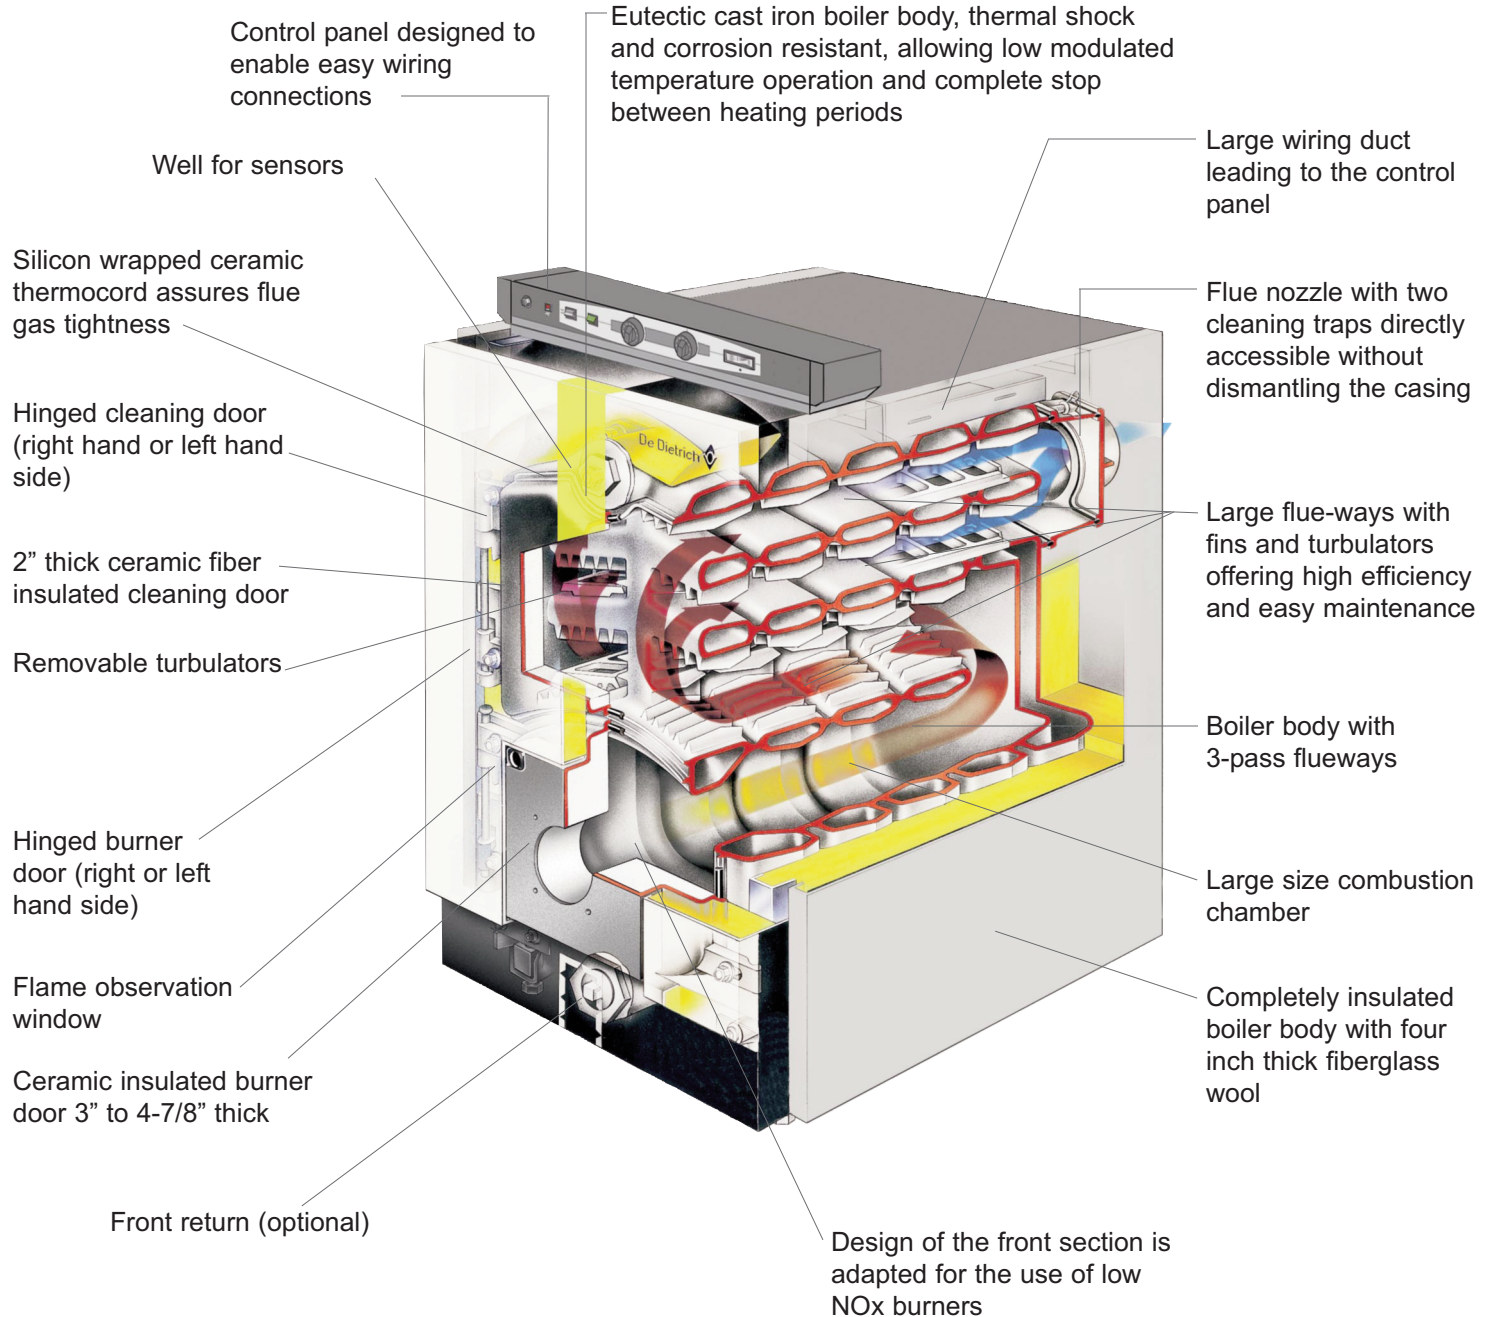


De Dietrich
B O I L E R S

As the Boiler Should Be!!!

**Setting the Benchmark for Low-Temperature
Near-Condensing Eutectic Cast Iron Boilers**

MEA 304-06-M (City of New York)



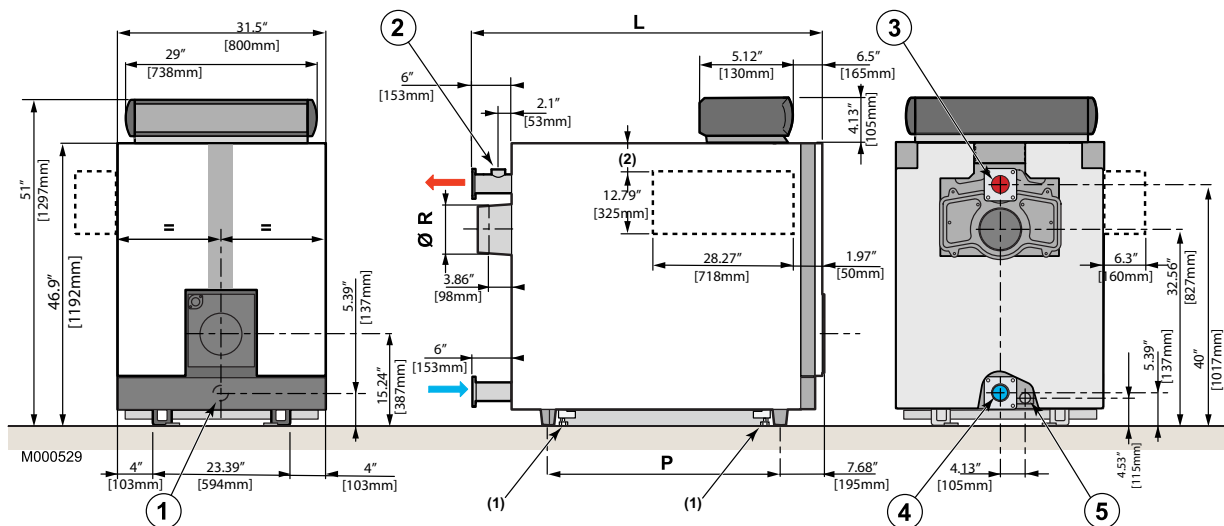

(1) Adjustable feet: basic dimension 0, adjustment possible: 0 to 1.57" [40mm]

	GT 334A	GT 335A	GT 336A	GT 337A	GT 338A	GT 339A
L	30 [991]	45.3 [1151]	51.6 [1311]	57.9 [1471]	64.2 [1631]	70.5 [1791]
P	19.3 [490]	25.6 [650]	31.9 [810]	31.2 [970]	44.5 [1130]	50.8 [1290]
ØR	7.1 [180]	7.1 [180]	7.1 [180]	7.9 [200]	7.9 [200]	7.9 [200]

1. Sludge removal hole Ø Rp 2 ½" (plugged)
2. Rp 1 ½" socket for the safety control unit
3. Heating outlet (clamp + counter flange with collar to be welded) Ø 2 ½" (Ø 2" option)
4. Heating return (clamp + counter flange with collar to be welded) Ø 2 ½" (Ø 2" option)
5. Rp 1 ½" draining outlet (plugged)

			Model					
Item	Unit		GT 334A	GT 335A	GT 336A	GT 337A	GT 338A	GT 339A
CSA - Gas Input	MBH		404	598	808	1,024	1,226	1,442
	Kw		118	175	237	300	359	423
CSA - #2 Fuel Oil Input	US/GPH		2.8	4.15	5.6	7.1	8.5	10
CSA - Output [Gas-Oil]	MBH		344	510	688	872	1,044	1,229
	Kw		100.8	149.4	201.6	255.7	306.1	360.1
Cast Iron Sections	#		4	5	6	7	8	9
Water Resistance Delta T=(°F)	18 (°F)	Ft Water	0.483	1.026	2.099	3.055	4.380	6.332
	27 (°F)	Ft Water	0.210	0.457	0.933	1.358	1.945	2.818
	36 (°F)	Ft Water	0.121	0.256	0.525	0.764	1.094	1.583
MAWP [Water]	PSI		ASME IV Rating Class 30 - (90 psi)					
S3NA Panel	Electrical Connection	V/P/H	120/1/60					
	Max. Water Temp.	(°F)	248					
	Safety Limit [MR]	(°C)	120					
	Water operating Temp. Range	(°F)	86-185					
Gas-vent category	#		I, II, III or IV					
Boiler-vent connection	inch		7	7	7	8	8	8
Boiler weight [dry]	LB		1,349	1,623	1,865	2,163	2,432	2,712
	Kg		612	736	846	981	1,103	1,230

Due to ongoing and continuous product improvements, DDR Americas Inc. reserves all rights to amend and delete information provided on this product specification table.

Notes:

- Approved for direct-vent applications - use only approved venting components as listed
- Natural draft applications, approved for Type L vent [Gas-Oil] or Type B Vent [Gas only]
- All model comply with latest Canadian & USA standards
- Outputs are rounded off. 85.2% efficiency is the published efficiency (oil is +3%)

DDR Americas Inc.

Toll Free: (800) 943-6275

www.dedietrichboilers.com

Represented By: