


Economizer Dimensional Data

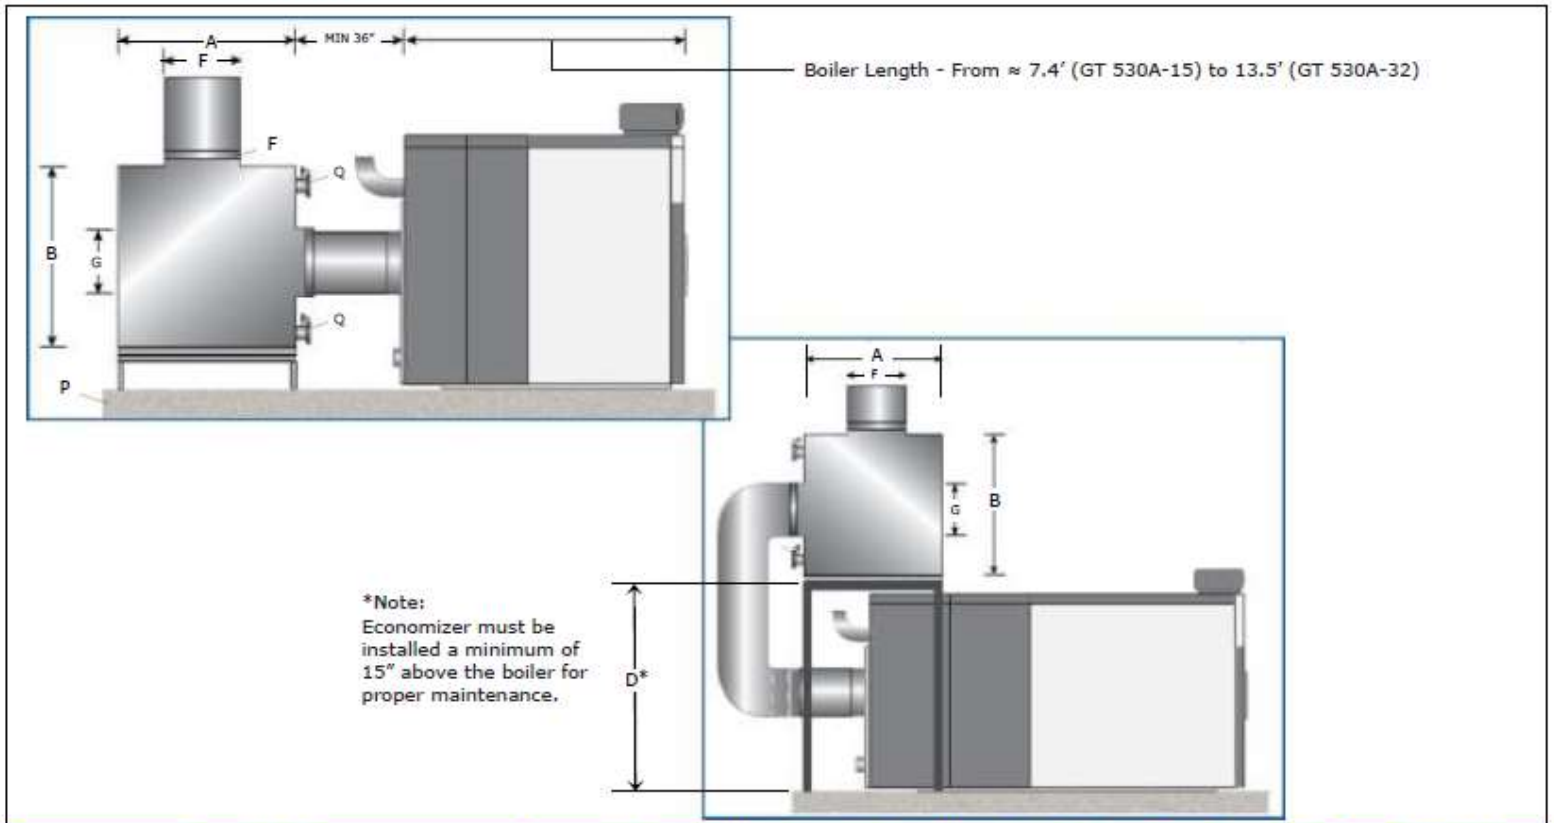

Ener-O-Mizer	Unit	ENM-4	ENM-6	ENM-7	ENM-8
Range	MBTU	3-4.2	4.2-6.2	6.2-7.2	7.2-8
Length	A (inch/mm)	32/813	42/1,066	49/1,245	52/1,321
Height	B (inch/mm)	47/1,168	47/1,168	51/1,295	51/1,295
Width	C (inch/mm)	48/1,219	48/1,219	52/1,321	52/1,321
Stand Height (floor to top of base)	D (inch/mm)	79/2006	79/2006	79/2006	79/2006
Distance Between Floor Stand Legs (inside dimension)	D2 (inch/mm)	50/1,270	54/1,372	54/1,372	54/1,372
Distance from Leg to Leg on Length (outside dimension)	D3 (inch/mm)	29/737	37/940	45/1,143	45/1,143
Stack Collar Height	E (inch/mm)	3/76	3/76	3/76	3/76
Flue Outlet Diameter (Nominal length. Consult vent supplier for correct sizing.)	F (inch/mm)	18/450	20/500	22/559	22/559
Flue Inlet Diameter (Nominal length. Consult vent supplier for correct sizing.)	G (inch/mm)	18/450	18/450	20/500	20/500
Min. House Keeping Pad Width	P (inch/mm)	62/1,575	66/1,676	66/1,676	66/1,676
Inlet/Outlet Pipe Size	Q (inch/mm)	3" NPT/76	3" NPT/76	4" flange/102	4" flange/102
Dry Weight (including legs)	Lbs/Kg	1,400/635	1,520/690	1,600/725	1,760/800
Water Content	Gallons/L	36/136	42/158	56/212	60/227